




# DAVIS › STANDARD®

Where your ideas take shape.

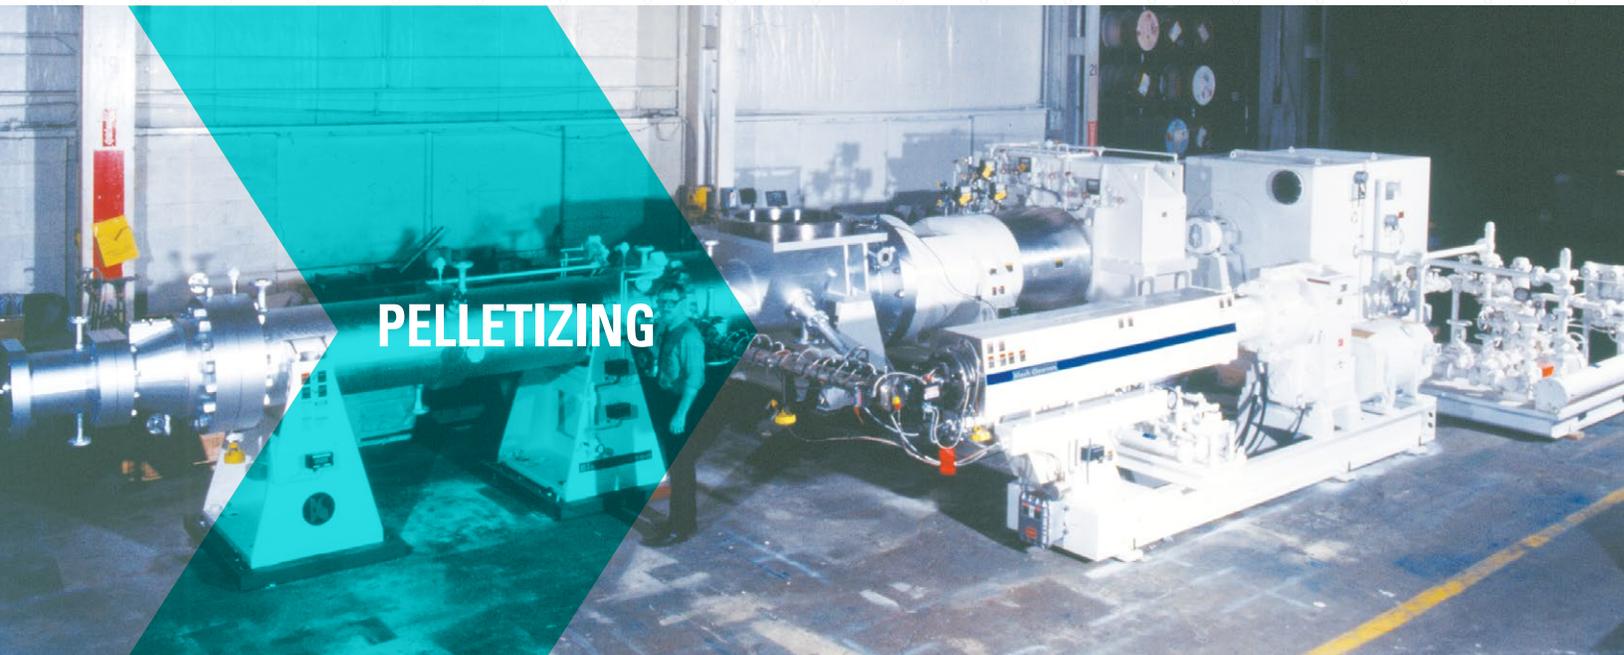

PELLETIZING

## SINGLE SCREW EXTRUDER 15" (381 mm) Melt Feed with Satellite Extruder

### OVERVIEW

#### Typical Process Applications

The modular extruder can be designed to receive molten feed material from a reactor or holding vessel, single or twin screw extruder, continuous mixer, mill or other device. Additives can be incorporated and mixed with the main product through a feed port, injection pump or satellite side arm extruder. Degassing of volatiles may be included where required. The product is then discharged to downstream equipment on a continuous basis.

### FEATURES

#### Typical Materials Processed

- Low, Medium, High and Linear Low Density Polyethylenes
- Co-Polymers (EVA, EMA, EMAA, EAA, etc.)
- Impact and Crystal Polystyrene
- Polypropylene
- Thermoplastic Elastomers (SBR, SIS, SBS, etc.)
- EPDM
- Polyamide (Nylon)
- ABS
- SAN
- Polyester
- Acetal
- Wax Blends
- Filled Polymers
- Cross Linkable Polymers
- Hot Melt Adhesives
- Polybutylene
- Polyurethane
- Polycarbonates
- Rubber
- Food
- Others

[davis-standard.com](http://davis-standard.com)

# SINGLE SCREW EXTRUDER 15" (381 mm) Melt Feed with Satellite Extruder

## TYPICAL FEATURES, BENEFITS AND OPTIONS

**Drive:** Precise variable speed constant torque and constant power to suit process

- AC or DC
- Typically direct connected

**Drive Coupling:** Flexible gear type

- All other types available

**Gear Reducer:** High torque capacity, minimum 1.5 service factor

**Thrust Bearing Section:** May be integral to or separate from the gear reducer to receive screw thrust load

- Typically 100,000 hr. B-10 life

**Lube System:** Closed loop for gear reducer / thrust bearing sections

**Product Feed Section:** Various size, shapes and methods to suit the process

- Jacketed for heating and cooling

**Screw Seal:** Various types available for melt, gaseous or solids sealing

**Barrel:** Various bimetallic linings for wear resistance

- Single length or sectional
- Length to diameter ratio to suit
- Venting/degassing ports when necessary
- Injection and satellite extruder ports

**Downstream Connection:** Bolting style head flange is typical to downstream equipment

- "C" clamp and others are optional

**Barrel Temperature Control**

- Steam, hot water, hot oil or resistance heating available
- Air, water or oil cooling typical
- Multiple zones for process dependant profile

**Feed Screw:** Designed for highest processing performance and output

- Various design types
- Various flight tip wear surfacing available

**Machine Support:** For precise structural alignment and integrity

- Water cooled centerline supports
- Structural sub base when needed
- Sole plates (fixed) or movable designs are available

**Instrumentation:** Product pressure, pressure protection and temperature probes, as well as control and indication sensors as applicable.

